

变更标记	日期	变更内容	签名	核准




Material & finish
SHELL:

steel
Zinc plated, Tin plated
or Nickel plated steel
PIN CONTACT:
Phosphor bronze or brass
Gold Plated

INSULATOR:
PBT & Glass-fibre reinforced
UL-94-V0

NUMBER OF CONTACT:
09 15 25 37
CURRENT RATING:
3Amp

INSULATOR RESISTANCE:
1000Mh MIN.(at 500V DC)
TEMPERATURE:
-55°C to +105°C

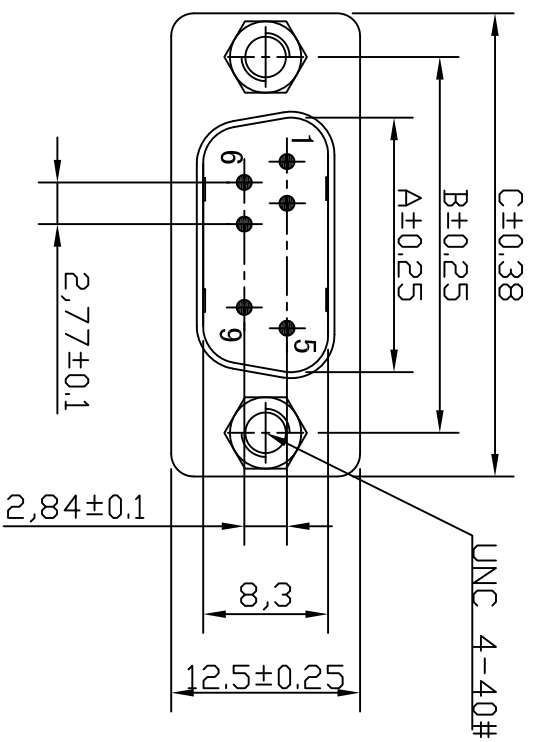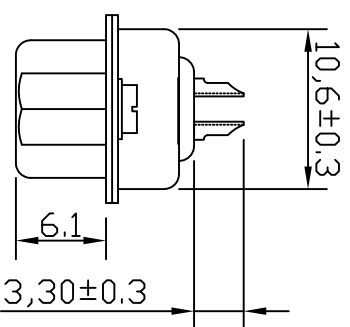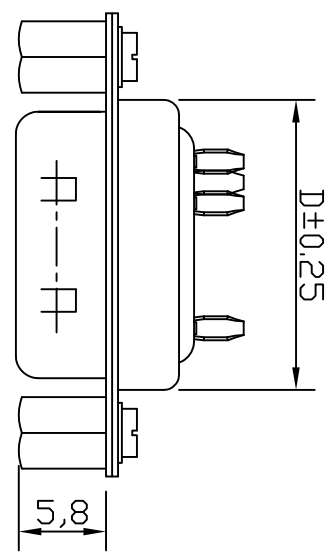

	A	B	C	D
09	16.9	25.0	30.8	19.0
15	25.35	33.3	39.2	27.7
25	39.0	47.0	53.0	41.0
37	55.4	63.5	69.4	57.3

DB-X M X V X X X D 0 0

Pin: 09 15 25 37

COLOUR

B: Blue K: Black W: White 2: 661C
blue 3: 235G Red 4: 322C green
6: 131CYellow

SHELL PLATING
A: Gold B: Front Gold and back Tin C: Front Nickel and
Back TIN N: Nickel T: Tin 5: Zinc D: CU/ZN/SN

Contact Finish
A: Gold Flash C: Gold Flash3U" D: Gold Flash5U" E: Gold Flash15U"
F: Gold Flash30U" G: Gold T: Tin



东莞扬顺五金电子有限公司
Dong Guan City Yang Shun Hardware Electron Co., Ltd

未注公差

X	±0.30
X.X	±0.20
X.XX	±0.10
X.XXX	±0.05
X.° ±2°	X.X° ±1°

设计 韩云

审核 雷永兴

品名规格

D-SUB-一体公前侧5.8六角塞孔焊线式

料号

单位

日期

比例

DB-xM/VxxxxD00

2012-09-03

1:1

型号

图号

版次

D-SUB 9-37Pin
YS-11-0018
A/0