
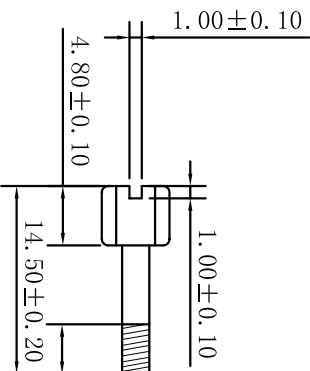






变更标记	日期	变更内容	签名	核准

	A	B	C	D	E	F
09	16.9	25.0	30.8	16.25	25.0	30.8
15	25.35	33.5	39.2	24.8	33.3	39.2
25	39.0	47.0	53.0	38.3	47.0	53.0
37	55.4	63.5	69.4	54.8	63.5	69.4

DGC 09~37 M/M GENDER CHANGER
 PIN OUT: 09~37Male 09~37Female



UNC #4-40 Hexscrew

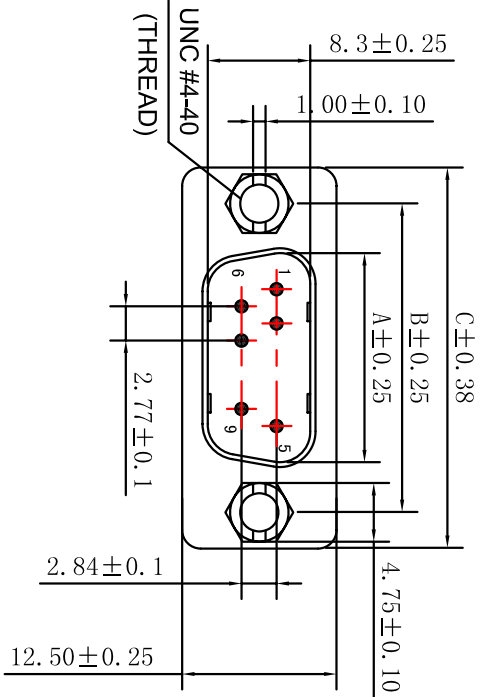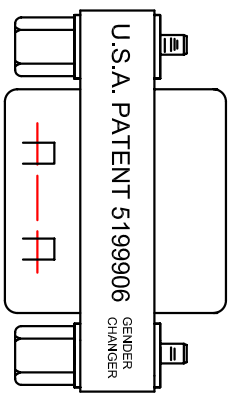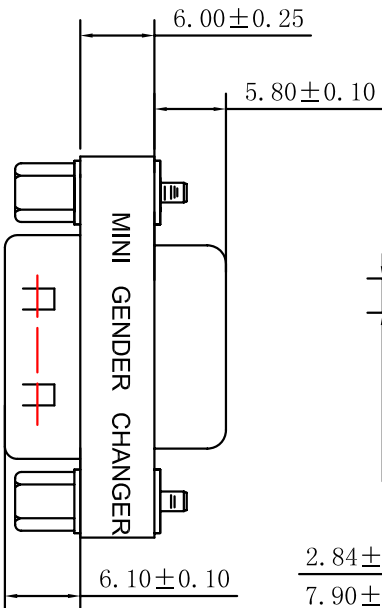

Label: yellow color with black character
 One side: MINI GENDER CHANGER
 The other side: U.S.A. PATENT 5199906 GENDER CHANGER
 SPECIFICATION
 INSULATOR: PBT Glass fibre reinforced UL 94 VO
 CONTACT: Brass
 CONTACT PLATING: Gold plated over nickel
 SHELL: Ni plated shell
 CURRENT RATING: 3 AMP
 DIELECTRIC STRENGTH: 1000V AC for one minute
 INSULATOR RESISTANCE: 1000 Ω min at 500V DC
 TEMPERATURE: -55° C --- +105° C



东莞扬顺五金电子有限公司
 Dong Guan Yang Shun Hardware Electron Co., Ltd

未注公差	设计	刘峰	品名规格	DB 09~37F/09~37M转接头锁台 (螺丝 14.5)
X. ±0.30	审核			
XX ±0.20	核准		料号	型号
XXX ±0.10	单位	mm	日期	2012.09.03
XXXX ±0.05			图号	图号
X* ±2° XX* ±1°			比例	1:1
			版次	A/0