


变更标记	日期	变更内容	签名	核准

**MATERIALS AND FINISH**


SHELL : STEEL,TIN FINISHED  
 INSULATOR : PBT UI94V-0 BLACK COLOR  
 SIGNAL CONTACT: COPPER ALLOY,GOLD PLATED  
 WATERTIGHT FRAME: PBT UI94-0 BLACK COLOR  
 O-RING : SILICONE  
 EPOXY SEALANT: EPOXY

**ELECTRICAL CHARACTERISTICS**

SIGNAL CONTACT CURRENT RATING 5.0 AMPS  
 SIGNAL CONTACT RESISTANCE 10mΩ MAX  
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC MIN.  
 INSULATION RESISTANCE : 5GΩ MIN.  
 TEMPERATURE RATING : -55°C ~ +105°C  
 DEGREE OF PROTECTION: IP67 ACCORD

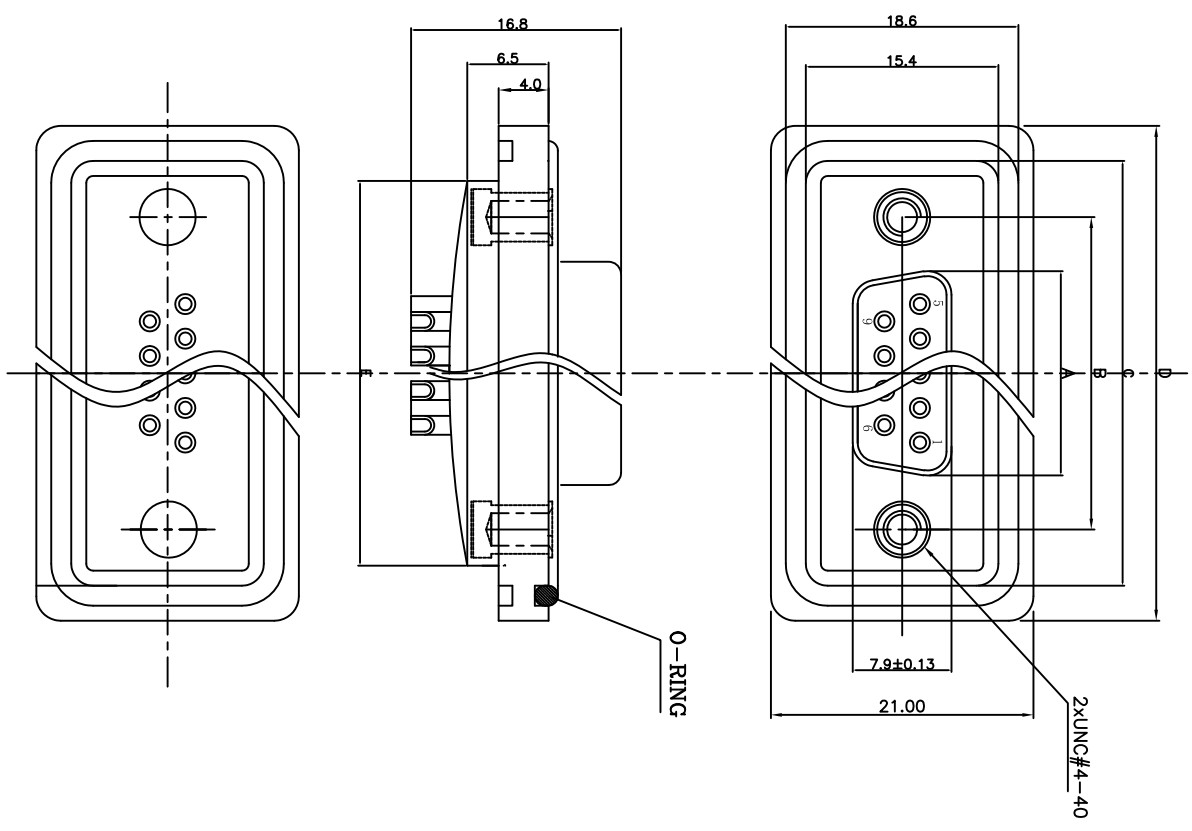

P.O.(XXX)	No. of Contact	A ±0.25				B ±0.13				C ±0.38				D ±0.13				E ±0.25			
		16.33		24.99		33.98		39.58		42.30		47.90		55.92		61.62		63.50		72.48	
009	9	16.33	24.99	33.98	39.58	42.30	47.90	55.92	61.62	63.50	72.48	72.48	72.48	72.48	72.48	72.48	72.48	72.48	72.48	72.48	
015	15	24.66	33.32	42.30	47.90	55.92	61.62	63.50	72.48	72.48	72.48	72.48	72.48	72.48	72.48	72.48	72.48	72.48	72.48	72.48	
025	25	38.38	47.04	56.02	61.62	63.50	72.48	72.48	72.48	72.48	72.48	72.48	72.48	72.48	72.48	72.48	72.48	72.48	72.48	72.48	
037	37	54.84	63.50	72.48	72.48	72.48	72.48	72.48	72.48	72.48	72.48	72.48	72.48	72.48	72.48	72.48	72.48	72.48	72.48	72.48	

 **东莞扬顺五金电子有限公司**  
 Dong Guan City Yang Shun Hardware Electron Co.,Ltd

未注公差		设计	刘峰	品名规格	D-SUB FEMALE SOLDIER 防水连接器			
X	±0.30	审核		料号	型号	D-SUB 9-37Pin		
X.X	±0.20	核准		日期	2015-5-20	图号		
X.XX	±0.10	单位	mm	比例	1:1	版次	A/0	
X.XXX	±0.05							
X° ±2°	X.X° ±1°							