
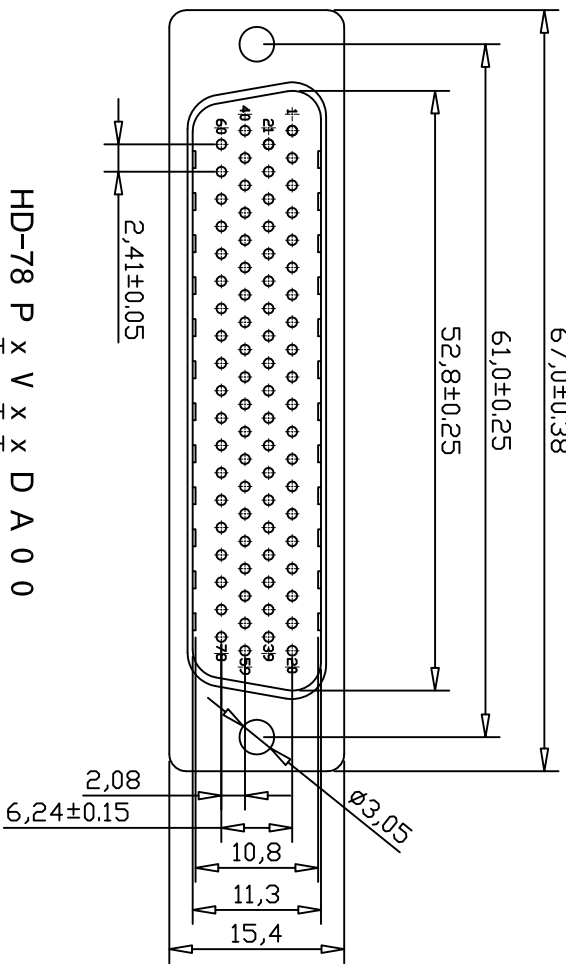


变更标记	日期	变更内容	签名	核准

Material & finish

SHELL:
 steel
 Zinc plated, Tin plated
 or Nickel plated steel
 PIN CONTACT:
 Phosphor bronze or brass
 Gold Plated
 INSULATOR:
 PBT & Glass-fibre reinforced
 UL-94-V0
 NUMBER OF CONTACT:
 15 26 44 62
 CURRENT RATING:
 3Amp
 INSULATOR RESISTANCE:
 1000Mn MIN. (at 500V DC)
 TEMPERATURE:
 -55°C to +105°C

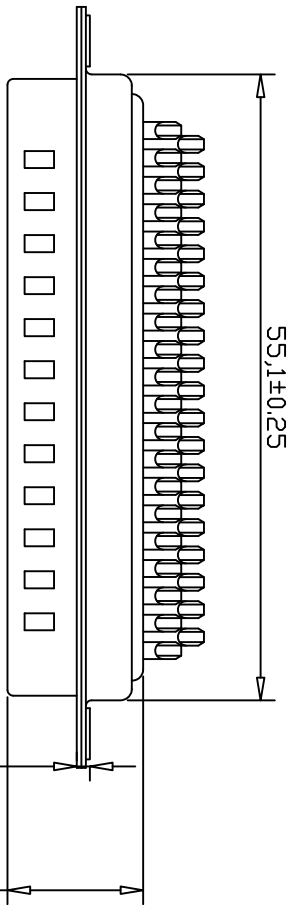

HD-78 P x V x X D A 0 0

COLOR
 B: Blue K: Black W: White 2: 6616
 blue 3: 235C Red 4: 322C green
 6: 131C yellow

SHELL PLATING
 A: Gold B: Front Gold and back Tin C: Front Nickel and
 Back TIN N: Nickel T: Tin 5: Zinc D: CUZIN5N
Contact Finish
 A: Gold Flash C: Gold Flash30U" D: Gold Flash5U" E: Gold Flash15U"
 F: Gold Flash30U" G: Gold T: Tin



东莞扬顺五金电子有限公司
 Dong Guan City Yang Shun Hardware Electron Co., Ltd

未注公差	设计	审核	品名规格	料号	日期	图号	型号
X. ±0.30	设计	雷永兴	HD 78PIN传统公焊线式	HD-78P-V-X-D-A00	2012-08-03	YS-11-0029	D-SUB 78Pin
XX ±0.20	审核						
XXX ±0.10	核准						
X.XXX ±0.05	单位	mm					
X° ±2° X.X° ±1°	比例	1:1					